


Glass Lined Cylinders: Direct 'Gold Shield' System

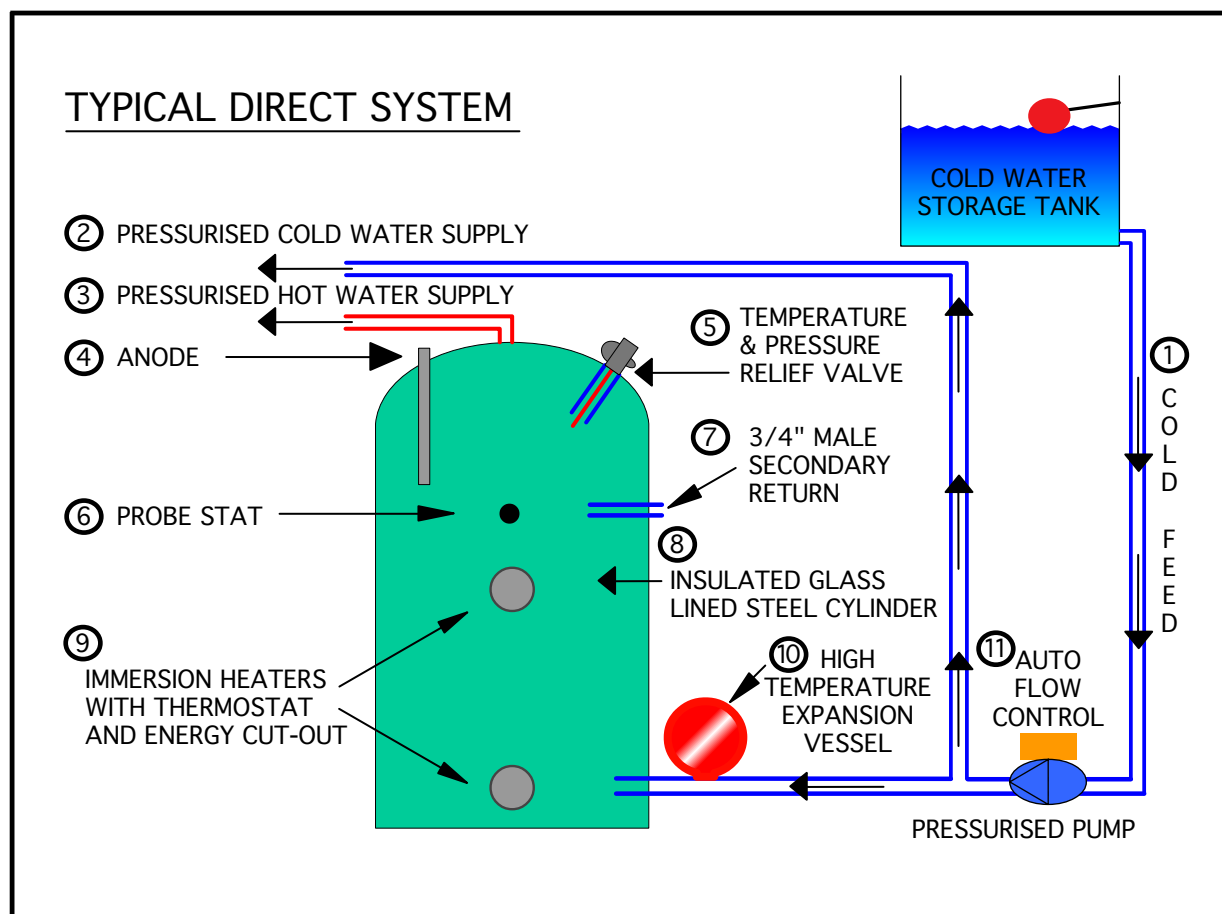

1. Cold Feed.
2. Pressurised cold water supply.
3. Pressurised hot water supply.
4. Magnesium Anode.
5. Temperature and Pressure Relief Valve (should be connected to drain facility).
6. 1/2" Fitting for Thermostat or Gauge
7. 3/4" Male Secondary Return.
8. Glass Lined Steel Cylinder, insulated with outer cladding
9. 3kW Immersion heaters with thermostat and energy cut-out.
10. High Temperature Expansion Vessel.
11. Auto flow control and pressurising pump.