


Glass Lined Cylinders: Indirect System

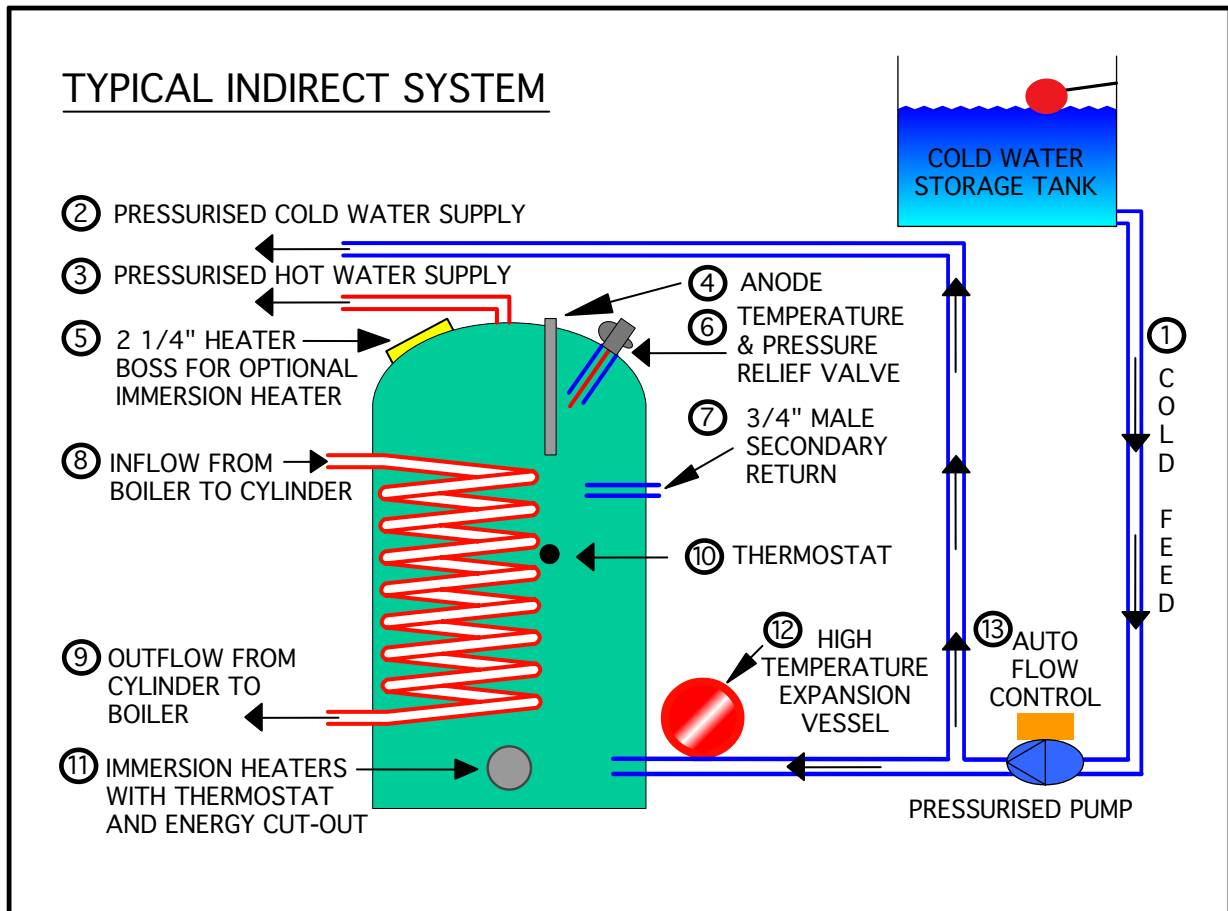

- | | |
|---|---|
| 1. Cold Feed. | 7. 3/4" Male Secondary Return. |
| 2. Pressurised cold water supply. | 8. Inflow from boiler to cylinder. |
| 3. Pressurised hot water supply. | 9. Outflow from cylinder to boiler. |
| 4. Magnesium Anode. | 10. 1/2" Fitting for thermostat or gauge |
| 5. 2 1/4" Heater Boss. (Could be used for second immersion heater). | 11. 3kW Immersion heaters with thermostat and Energy cut-out. |
| 6. Temperature and Pressure Relief Valve (should be connected to drain facility). | 12. High Temperature Expansion Vessel. |
| | 13. Auto flow control and pressuring pump. |